



Method of manufacture of a composite concrete article (Process C)

Belford, P., & Morrow, R. (2009). Method of manufacture of a composite concrete article (Process C). (Patent No. *PCT/EP2010/001777*).

[Link to publication record in Ulster University Research Portal](#)

Publication Status:

Published (in print/issue): 06/04/2009

Document Version

Publisher's PDF, also known as Version of record

General rights

Copyright for the publications made accessible via Ulster University's Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

The Research Portal is Ulster University's institutional repository that provides access to Ulster's research outputs. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact pure-support@ulster.ac.uk.



(51) International Patent Classification:

E04C 2/04 (2006.01) *B28B 23/00* (2006.01)
B28B 19/00 (2006.01)

(21) International Application Number:

PCT/EP2010/001777

(22) International Filing Date:

22 March 2010 (22.03.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

090 5951.0 6 April 2009 (06.04.2009) GB

(71) Applicants (for all designated States except US): **UNIVERSITY OF ULSTER** [GB/GB]; Cromore Road, Coleraine, County Londonderry, BT52 1 SA United Kingdom (GB). **MORROW, Ruth, Ellen** [GB/GB]; 1 Creagh Park, Belfast, Northern Ireland BT6 9LF (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BELFORD, Patricia, Claire** [GB/GB]; 2a Irwin Avenue, Belfast, Northern Ireland BT4 3AF (GB).

(74) Agents: **WALLER, Stephen** et al.; FRKELLY, 4 Mount Charles, Belfast, BT7 1NZ, Northern Ireland (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF MANUFACTURE OF A COMPOSITE CONCRETE ARTICLE



Figure 2

(57) Abstract: A method of manufacturing a composite concrete article comprising forming a textile structure, removing material from regions of the textile structure to create voids in the textile structure and incorporating the textile structure into a body of wet uncured concrete such that the concrete flows into the voids created in the textile structure, embedding the textile structure into the concrete, whereby the textile structure defines at least a portion of a surface of the cured concrete article.

Method of manufacture of a Composite concrete article

This invention relates to a method of manufacture of a composite concrete article, and in particular to a method of manufacture of a concrete article having textile structures integrated into the surface of the concrete to provide a novel aesthetic and/or functional surface finish.

Concrete is a commonly utilised as a construction material due to its low cost, ease of prefabrication into desired shapes, and strength. However, concrete structures and elements have a cold, hard and unattractive surface finish with poor acoustic and thermal properties.

An object of the present invention is to improve one or more of the appearance, thermal experience and/or acoustic properties or other surface characteristics of concrete by integrating textile structures into concrete articles such that at least portions of the textile structures define at least a portion of the exposed surfaces of the articles.

Prior art attempts to apply textile materials to the surface of concrete articles have mainly been focussed on applying such materials to the surface of the finished concrete articles. Few attempts have been made to integrate textile materials into concrete articles, mainly due to the harsh environment posed by uncured concrete (highly alkaline) and the difficulty in adhering a textile material to the concrete structure in a manner such that the textile material will not simply peel off the concrete once it has set.

According to the present invention there is provided a method of manufacturing a composite concrete article comprising forming a textile structure, removing material from regions of the textile structure to create voids in the textile structure and incorporating the textile structure into a body of wet uncured concrete such that the concrete flows into the voids created in the textile structure, embedding the textile structure into the concrete, whereby the textile structure defines at least a portion of a surface of the cured concrete article.

Preferably the voids comprise regions of reduced thread density, such regions having greater porosity to wet concrete. The step of removing material from regions of the textile may comprise forming a particular visual or textural effect in the textile structure.

Preferably said textile structure is formed from a mixture of at least two different materials or fibres, said step of removing material from regions of the textile structure comprising a process for preferentially removing one of said materials or fibres from said regions. Preferably at least one of said at least two different materials is more resistant to said material removal process than the other or others of said at least two different materials from which the textile structure is formed.

In one embodiment said at least one more resistant material comprise a metallic material, such as metallic wires or threads. Alternatively, or additionally, said at least one more resistant material may

comprises a natural or man made yarn selected to have a greater resistance to said removal process than the other or others of said two or more different materials.

The textile structure may comprise a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.

The removal process may comprise a mechanical process or a chemical process. Preferably the removal process comprises a chemical etching process, such as a devoré process. Two or more different removal processes may be carried out to remove different materials or fibres from different portions or regions of the textile structure. For example, different devoré mixes or recipes may be used to selectively remove different fibres from different regions of the textile structure to create a specific visual and/or textural effect.

According to a further aspect of the present invention there is provided a composite concrete article comprising a textile structure embedded in the surface of a concrete structure, said textile structure having voids formed therein by means of which the textile structure is embedded into the concrete structure to anchor the textile structure to the concrete structure.

The voids may create a particular visual or textural effect in the textile structure. The voids preferably comprise regions of reduced thread density having greater porosity to wet concrete.

Preferably the textile structure is formed at least two different materials or fibres, wherein at least one of said two materials is more resistant to the removal process used for creating said voids than another of said at least two materials.

In one embodiment said at least one more resistant material comprise a metallic material while the other or others of said two or more materials comprises a non-metallic material, such as a natural or man made yarn. The other or others of said two or more materials may comprise, for example, cotton, linen or a synthetic yarn. In one embodiment said at least one more resistant material comprises steel wires or threads.

In an alternative embodiment said at least one more resistant material comprises a natural or man made yarn selected to have a greater resistance to said removal process than said other or others of said two or more materials.

The textile structure may comprise a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.

An embodiment of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 shows a fabric material for use in a method of manufacture of a composite concrete article according to an embodiment of the present invention; and

Figure 2 shows a composite concrete article made in accordance with said method.

A method of manufacturing a composite concrete article according to an embodiment of the present invention comprises forming a woven fabric from stainless steel wires and linen. The warp of the fabric is made up of linen only and the weft comprises alternate yarns of linen & stainless steel wire (see Figure 1).

After production of fabric, the next stage is that the woven fabric goes through a devoré process. The fabric is screenprinted with a selected pattern (i.e. certain sections of the surface are exposed) to a devoré recipe comprising :

400gm Indalca PA3R (13%)
150gm Aluminium Sulphate
50gm Glycerine
400gm Water

The treated fabric is then dried at room temperature before being baked for around 10mins at approximately 180°C. The fabric is then washed in water, optionally containing a mild detergent, to remove the linen that has come into direct contact with the devoré recipe. This results in a textile that has a pattern of solid and void, as shown in Figure 1.

The treated fabric is then placed in the bottom of a mould, with the face intended to form the outer face of the composite concrete article facing downwards, and uncured concrete is poured into the mould. The concrete flows into the voids in the fabric such that the fabric becomes firmly embedded in the concrete, as shown in Figure 2.

While a devoré process is described for forming the pattern and voids within the fabric, any other suitable mechanical or chemical process may be utilised to form suitable voids within the fabric to ensure that the concrete can flow into the fabric to firmly embed the fabric within the concrete.

The steel weft yarns may be shaped or crumpled to give the fabric a three dimensional shape to provide enhanced textural structures with unique acoustic characteristics in the surface of the concrete, with substantial depth. Linen and stainless steel may be used due to their high resistance to the corrosive effects of the highly alkaline environment of the concrete mix. However, other metals and textiles may be used, providing they are sufficiently resistant to such an environment.

In an alternative embodiment, a textile structure comprising a viscous pile formed on a polyester/polyamide backing may be used, wherein a suitable devoré process is used to selectively remove portions of the viscous pile from selected regions of the polyester/polyamide backing to
5 create voids/regions of reduced thread density into which wet uncured concrete may flow to embed the textile structure into the finished concrete article and to create a desired visual and/or textural effect on the surface of the finished concrete article.

The invention is not limited to the embodiment(s) described herein but can be amended or modified
10 without departing from the scope of the present invention. The process of selectively removing regions of a particular fibres from a mixed fibre fabric or construction using a removal process, such as a suitable devoré process, can be used to create voids or regions of reduced thread density in numerous different mixed fibre materials to enable such material to be embedded into a concrete article while creating a selected visual and/or textural affect on the surface of the finished concrete
15 article to achieve a wide range of aesthetic and functional effects to enhance the visual, textural and acoustic characteristics of the article.

Claims

1. A method of manufacturing a composite concrete article comprising forming a textile structure, removing material from regions of the textile structure to create voids in the textile structure
5 and incorporating the textile structure into a body of wet uncured concrete such that the concrete flows into the voids created in the textile structure, embedding the textile structure into the concrete, whereby the textile structure defines at least a portion of a surface of the cured concrete article.
2. A method as claimed in claim 1, wherein the voids comprise regions of reduced thread
10 density, such regions having greater porosity to wet concrete.
3. A method as claimed in claim 1 or claim 2, wherein the step of removing material from regions of the textile comprises forming a particular visual or textural effect in the textile structure.
- 15 4. A method as claimed in any preceding claim, comprising forming said textile structure from a mixture of at least two different materials or fibres, said step of removing material from regions of the textile structure comprising a process for preferentially removing one of said materials or fibres from said regions.
- 20 5. A method as claimed in claim 4, wherein at least one of said at least two different materials is more resistant to said material removal process than the other or others of said at least two different materials from which the textile structure is formed.
6. A method as claimed in claim 5, wherein said at least one more resistant material comprise
25 a metallic material, such as metallic wires or threads.
7. A method as claimed in claim 6, wherein said at least one more resistant material comprises a natural or man made yarn selected to have a greater resistance to said removal process than the other or others of said two or more different materials.
30
8. A method as claimed in any of claims 4 to 7, wherein said textile structure comprises a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.
- 35 9. A method as claimed in any of claims 4 to 8, wherein said removal process comprises a mechanical process.
10. A method as claimed in any of claims 4 to 8, wherein said removal process comprises a chemical process.
40

11. A method as claimed in claim 10, wherein the removal process comprises a chemical etching process, such as a devoré process.
12. A method as claimed in any of claims 4 to 11, wherein two or more different removal
5 processes are carried out to remove different materials or fibres from different portions or regions of the textile structure.
13. A composite concrete article comprising a textile structure embedded in the surface of a concrete structure, said textile structure having voids formed therein by means of which the textile
10 structure is embedded into the concrete structure to anchor the textile structure to the concrete structure.
14. An article as claimed in claim 13, wherein said voids create a particular visual or textural effect in the textile structure.
15. An article as claimed in claim 13 or claim 14, wherein the voids comprise regions of reduced thread density having greater porosity to wet concrete.
16. An article as claimed in claim 15, wherein textile structure is formed at least two different
20 materials or fibres, wherein at least one of said two materials is more resistant to the removal process used for creating said voids than another of said at least two materials.
17. An article as claimed in claim 16, wherein said at least one more resistant material comprise a metallic material while the other or others of said two or more materials comprises a non-metallic
25 material, such as a natural or man made yarn.
18. An article as claimed in claim 17, wherein said other or others of said two or more materials comprise cotton, linen or a synthetic yarn.
- 30 19. An article as claimed in claim 17 or claim 18, wherein said at least one more resistant material comprises steel wires or threads.
20. An article as claimed in claim 16, wherein said at least one more resistant material comprises a natural or man made yarn selected to have a greater resistance to said removal process
35 than said other or others of said two or more materials.
21. An article as claimed in any of claims 16 to 20, wherein said textile structure comprises a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.

1/1

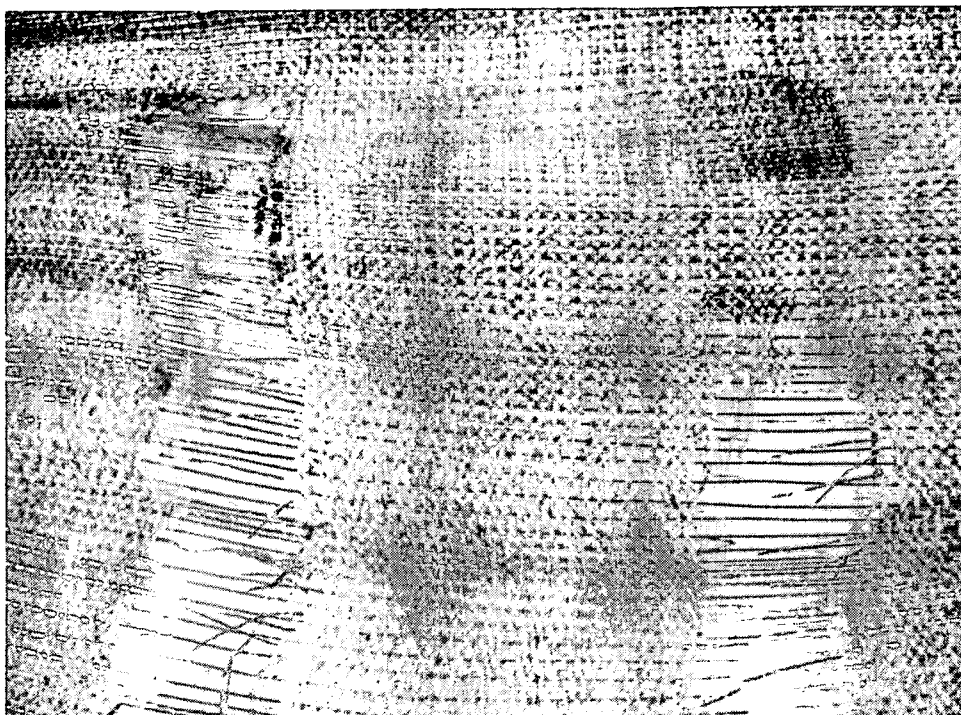


Figure 1



Figure 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/001777

A. CLASSIFICATION OF SUBJECT MATTER

INV. E04C2/04 B28B19/00 B28B23/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E04C B28B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 818 437 A1 (MILLIKEN EUROP NV [BE]) 15 August 2007 (2007-08-15)	13-21
A	the whole document	1
A	JP 2001 159047 A (YOKOHAMA RUBBER CO LTD) 12 June 2001 (2001-06-12) * abstract; figure 1	17-21
A	US 2005/009428 A1 (PORTER JOHN FREDERICK [CA] ET AL) 13 January 2005 (2005-01-13) paragraphs [0076], [0084]	17-21
A	US 2004/142618 A1 (PORTER JOHN FREDERICK [CA]) 22 July 2004 (2004-07-22) paragraph [0078]	17-21
	----- -/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 June 2010

Date of mailing of the international search report

23/06/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Vratsanou, Violandi

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/001777

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/084127 A1 (PORTER JOHN FREDERICK [CA]) 6 May 2004 (2004-05-06) * abstract; figure 1 -----	13
A	US 4 378 405 A (PILGRIM THOMAS A [GB]) 29 March 1983 (1983-03-29) * abstract; figure 2 -----	13
A	JP 2002 348749 A (TORAY INDUSTRIES) 4 December 2002 (2002-12-04) * abstract; figure 2 -----	13
A	JP 2003 119641 A (TORAY INDUSTRIES) 23 April 2003 (2003-04-23) * abstract; figures 1-2 -----	13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/001777

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1818437	A1	15-08-2007	WO 2007093377 A1	23-08-2007
JP 2001159047	A	12-06-2001	NONE	
US 2005009428	A1	13-01-2005	CA 2530912 A1	27-01-2005
			US 2008200086 A1	21-08-2008
			US 2006013950 A1	19-01-2006
			WO 2005007988 A2	27-01-2005
US 2004142618	A1	22-07-2004	AU 2004207774 A1	12-08-2004
			CA 2513508 A1	12-08-2004
			CN 1754015 A	29-03-2006
			EP 1595012 A2	16-11-2005
			JP 2006517268 T	20-07-2006
			JP 2009149510 A	09-07-2009
			JP 2009174310 A	06-08-2009
			MX PA05007692 A	25-05-2006
			NZ 541275 A	24-12-2008
			US 2006105653 A1	18-05-2006
			US 2006065342 A1	30-03-2006
			WO 2004067271 A2	12-08-2004
US 2004084127	A1	06-05-2004	NONE	
US 4378405	A	29-03-1983	AT 385233 B	10-03-1988
			AU 531527 B2	25-08-1983
			AU 5872880 A	04-12-1980
			BE 883527 A1	01-12-1980
			CA 1148458 A1	21-06-1983
			CH 637320 A5	29-07-1983
			DE 3019917 A1	11-12-1980
			DK 231180 A	01-12-1980
			ES 8102493 A1	16-04-1981
			FI 801765 A	01-12-1980
			FR 2457754 A1	26-12-1980
			GB 2053779 A	11-02-1981
			GR 68472 A1	04-01-1982
			IE 49483 B1	16-10-1985
			IT 1131220 B	18-06-1986
			JP 1026845 B	25-05-1989
			JP 1551685 C	23-03-1990
			JP 55162487 A	17-12-1980
			JP 1520405 C	29-09-1989
			JP 63065482 B	15-12-1988
			JP 63172607 A	16-07-1988
			LU 82494 A1	08-10-1980
US 4378405	A		NL 8003121 A	02-12-1980
			NO 801602 A	01-12-1980
			NZ 193792 A	18-11-1983
			PL 224587 A1	13-02-1981
			SE 441610 B	21-10-1985
			SE 8004007 A	01-12-1980
			SU 1706381 A3	15-01-1992
			ZA 8003205 A	27-05-1981
JP 2002348749	A	04-12-2002	NONE	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/001777

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2003119641 A	23-04-2003	JP 3846252 B2	15-11-2006